


LETI 300

RECESSED LAMP

Recessed wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **2x Kelvin settable GX53 LED lamps included**. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

*Lampada LED per incasso a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con **include 2 lampadine a LED GX53 con Kelvin impostabile** certificate TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.*



5C4.000.G2K

CCT SETTABLE



3000 K

4000 K

6500 K

SDCM <6



LETI 300 - COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

Opal DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.

HOUSING made of shockproof resin material, suitable for the electrical devices fixation. Provided with **2x GX53 led lamps** or with E27 lampholder and with silicone rubber gasket to ensure high protection against external agents.

CASSA realizzata in resina antiurto, adatta ad alloggiare gli accessori elettrici. Fornita completa di **2 lampadine led GX53** o di portalamпада E27 e guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

INSTALLATION HOUSING made of resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

CONTRO-CASSA in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.

LETI 300



Dimensions and weight

Height: 113 mm
Width: 293 mm
Installation housing depth: 98 mm
Weight: 0,9 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

GX53 LED



Recessed lamp supplied complete with 2x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.

100 - 240 V				*ADD. SUFFIX
	2x 3W 6W	700 Lm	6500 K	.G2K
			4000 K	
			3000 K	

2x 3W 700 Lm = 60W incandescent

SAVE 90%

E27



Recessed lamp supplied complete with E27 lampholder.


E27 (CFL -LED)	max 160 mm	*ADD. SUFFIX .E27
--------------------------	------------	----------------------

LED LAMPS



Technical details on page 552.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

LETI 300

RECESSED LAMP

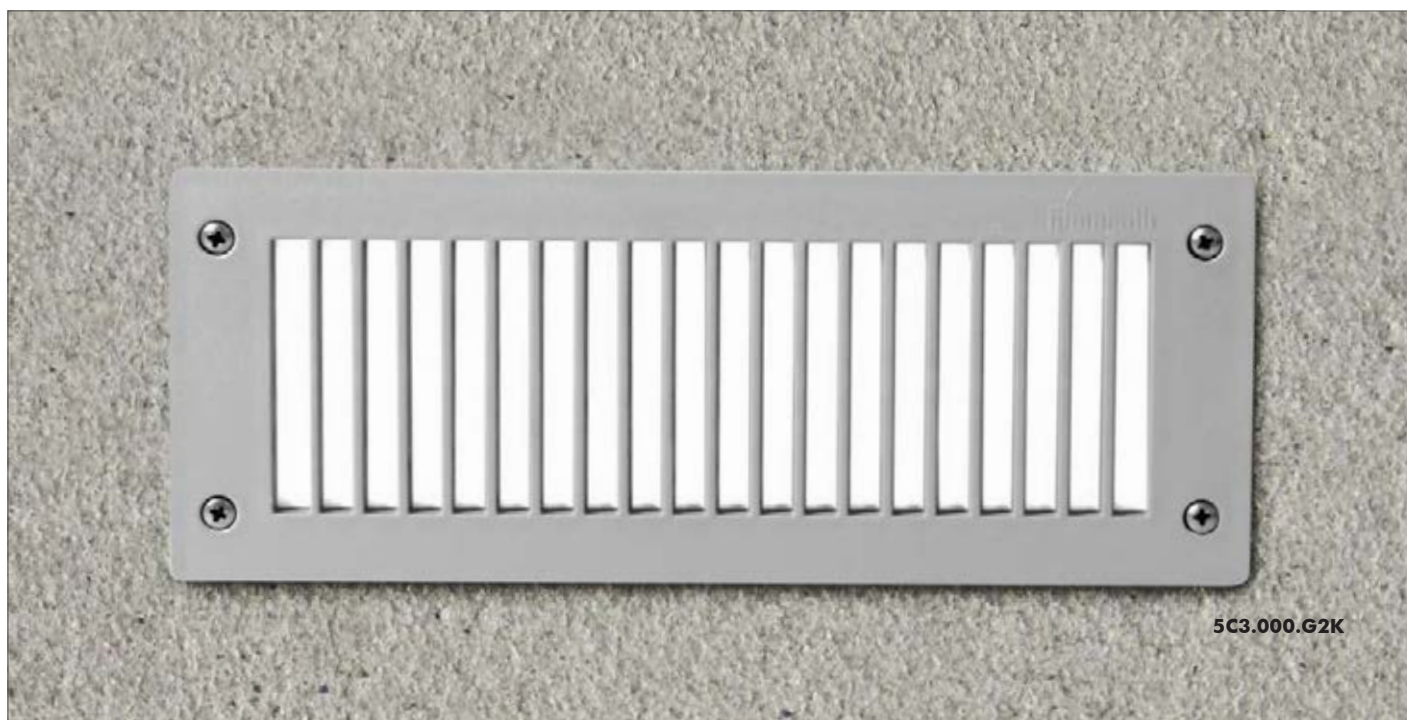

MADE IN ITALY

LETI 300 5C1.000.G2K

6W

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 24
Kg 22,7
mc 0,12

LETI 300-GL 5C2.000.G2K

6W

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 24
Kg 22,7
mc 0,12

LETI 300-RS 5C3.000.G2K

6W

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 24
Kg 22,7
mc 0,12

LETI 300-HS 5C4.000.G2K

6W

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 24
Kg 22,7
mc 0,12

LETI 300-VP 5C5.000.G2K

6W

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 24
Kg 22,7
mc 0,12